



FORMIKO
HYDRAULICS

ROTATOR **FHR 5.500L**



55
kN

32.5
kN

1300
nm

26
kg

20
l/min



73 \varnothing 30
mm



3/8"
BSP



250
bar



3/8"
BSP



200
bar



300
bar

Hydraulic rotator FHR 5.500L is cost-effective solution generally for seasonal use in forestry, agriculture, road and building construction, general cargo and material handling.

Rotator's upper mount is applied in EYE form factor of the knuckle joint. Robust and tough built to withstand even overloads. The wide of eye is common standard width 73mm and the knuckle pin diameter 30mm.



FHL 01-A/B-
73/30



FHL 01B-
A/B-73/30




Rotator lower mount is applied in AXLE form factor to mount in grapple / tool mounting tube or addaptor and by fixing with pin. Axle (shaft) diameter is 69mm and the fixing pin (not included) diameter 30mm



69 \varnothing 30
mm



3/8"
BSP

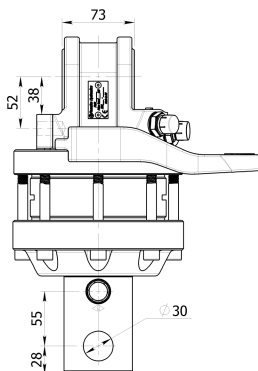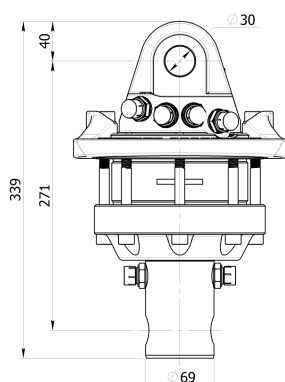

For additional information relating to price levels and technical data, please contact sales@formiko.lv

Formiko Hydraulic s Ltd

Dzirciema Str. 119 k-1,
Rīga LV1055 LATVIA

+371 294 49 552

+371 264 59 383

sales@formiko.lv

www.formiko.lv

On request by special conditions there are metric nipples available for rotator FHR 5.500L



FORESTRY



GENERAL CARGO



AGRICULTURE



CONSTRUCTION



Current document is automatic generated at www.formiko.lv on 08/21/2018.
Please always make sure that it's up to date and try to be paperless!



Hydraulic rotator FHR 5.500L is cost-effective solution generally for seasonal use in forestry, agriculture, road and building construction, general cargo and material handling.



Rotator's upper mount is applied in EYE form factor of the knuckle joint. Robust and tough built to withstand even overloads. The wide of eye is common standard width 73mm and the knuckle pin diameter 30mm.



Rotator lower mount is applied in AXLE form factor to mount in grapple / tool mounting tube or addaptor and by fixing with pin. Axle (shaft) diameter is 69mm and the fixing pin (not included) diameter 30mm



Rotator FHR 5.500L based on reliable vane type hydraulic motor which delivers torque up to 1300Nm at 25MPa.



Formiko rotator FHR 5.500L is compatible with FHL 01-A/B-73/30 and FHL 01B-A/B-73/30 series links.



Rotator for shipping is packed in compact solid cardboard box with dimensions 340x230x240mm.



We providing TWO year warranty for this rotator.

For additional information relating to price levels and technical data, please contact sales@formiko.lv

Formiko Hydraulic s Ltd

Dzirclima Str. 119 k-1,
Riga LV1055 LATVIA

+371 294 49 552

+371 264 59 383

sales@formiko.lv

www.formiko.lv

On request by special conditions there are metric nipples
available for rotator FHR 5.500L



FORESTRY



GENERAL CARGO



AGRICULTURE



CONSTRUCTION

